

# PulsedAmp 5x


## Pulsed Amplification of Continuous Wave Radiation for Low Repetition Rates

- Ideal source for single frequency laser pulses
- Either Ti:Sa or dye based cw systems can be used as seed for large wavelength ranges
- Also possible: To employ diode lasers with high isolation for smaller wavelength ranges
- Seed input power: 50 - 300 mW single frequency
- High peak powers while ultra low amplified spontaneous emission (ASE)
- Consists of five amplification stages
- Three circulator systems with dye cells integrated in single housing
- Unique performance: Dramatically suppressed ASE and cw seed beam due to phase conjugated mirror based on Stimulated Brillouin Scattering (SBS)
- Optional SHG/THG frequency conversion or other nonlinear conversion processes can be used

## Performance

Using 300 mW of seed radiation and 400 mJ of pump laser energy it is possible to generate 30 mJ pulses at 730 nm (Pyridine 2). However, results depend of wavelength, seed laser and pump laser details.

The graph shows the spectral profile of the pulses. The linewidth is determined by the pulse duration and shape (Fourier-limit) of the pump laser, in this case a non-seeded YAG laser.

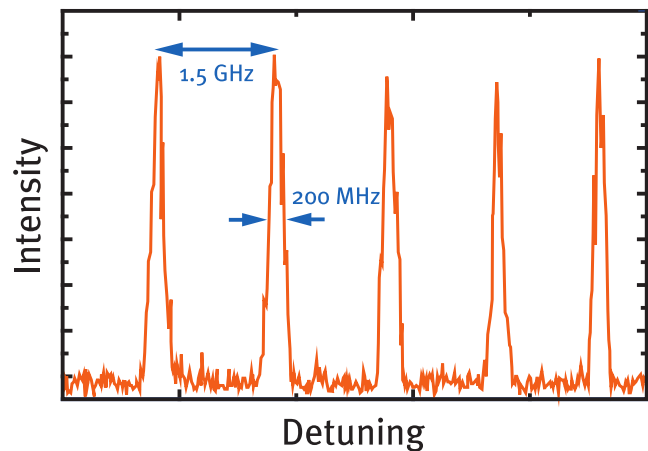

## General Characteristics


Repetition Rate	1 - 400 Hz
Wavelength Range	545 - 900 nm (pumped with 532 nm)
	374 - 560 nm (pumped with 355 nm)
Linewidth	180 MHz
Conversion Efficiency	up to < 20%
ASE	< 0.1%
Divergence	0.5 mrad
Beam Size	approx. 5-6 mm (typical)
Pump Energy	800 mJ @ 532 nm
	600 mJ @ 355 nm

## Requirements


Seed Laser	50 - 300 mW, linear polarization
Ambient Conditions	constant temperature in the 20-30 °C range, 80% max. rel. humidity, non condensing
Optical Isolation	> 30 dB
Cooling	required for dye solution (600 Watt)
Laboratory	vibrational isolated optical table, dust-free air (flow box)
Voltage	110 - 220 V, single phase, 50/60 Hz

# PulsedAmp 5x




## PulsedAmp 5x



## Optical Layout

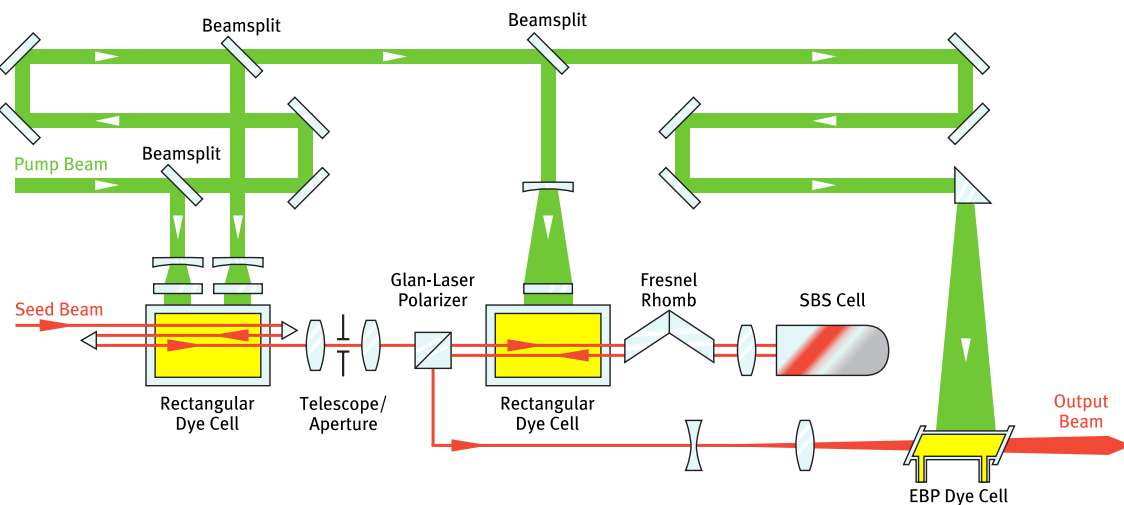

## Dimensions

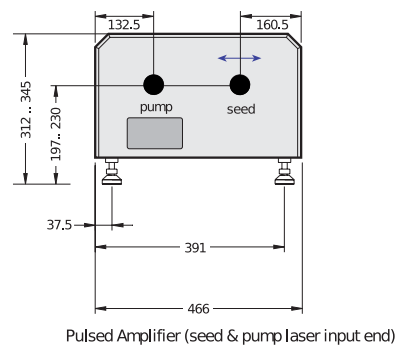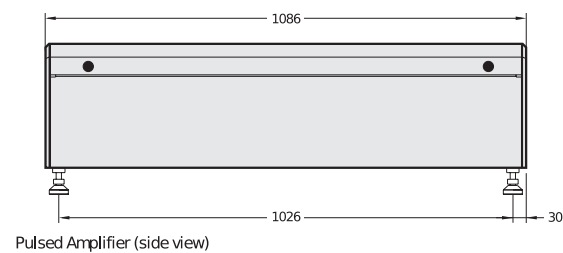

All Dimensions in mm  
Specifications are subject to change without notice



Sirah Lasertechnik GmbH  
Heinrich-Hertz-Straße 11  
41516 Grevenbroich

Phone +49 (0)2182 829818-0  
Fax +49 (0)2182 829818-40  
Web www.sirah.com

**Sirah**  
Lasertechnik